

## INSTRUCTION FOR WIRELESS LASER BARCODE SCANNER

★ The standard configuration of each wireless laser barcode scanner includes: Scanner (handheld), receiver (base) (with USB cable), antenna (3 m suction cup antenna), 5V charger (AC / DC power adapter) (for battery charging of scanner), and charger with USB cable, manual.

★ Accessories include: 5V AC / DC power adapter (for RS232 cable)

★ When clean stains and dust on the scan window, it is recommended to use the lens swabs, wipe gently, and then blow it clean with blowing balloons. Clean the reader shell, you can use a soft cloth (can be moistened with water) to wipe.


★ Hand-held terminal (scanner)

- ① scan window
- ② trigger
- ③ charging port (charger connected to 5V)
- ④ power switch
- ⑤ loud mouth
- ⑥ blue light (transfer success); 【light on when enter the inventory mode】

★ External view



- ★ Base (USB port)
  - ① red LED (power); (light on when data receiving)
  - ② USB port (connected to the USB port of computer host via 1.5 m cable)
  - ③ antenna
  - ④ cap screws on the antenna (mounted on the antenna to tighten up)

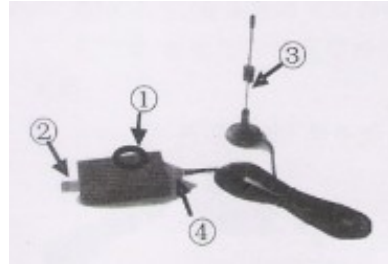

★ Turn on and off the scanner power to charge the battery

◆ Open the scanner's power:

Press the power switch button "1" (refer to the external view), hear the "beep" sound, is off.

◆ Close the scanner's power:

Pressing the power switch button "0" (refer to the external view).

◆ Battery charging:

- (1) Before the first use, the battery is fully charged. When charge, please ensure that the scanner is under the off circumstances, the charger will light green when access outlet, when the battery is charging, the green light of the charger will change to red light. When charging completed, the indicator will go off, then turn into a green light.
- (2) Charging time: take a full about 2-4 hours.

◆ Charger and scanner charging diagram


★ Installation methods of base and antenna

Note: any anomalies occurred while operating, turn off the power, re-start it according to the appropriate steps.

◆ Base Installation

Dock with a USB cable installation steps are as follows:

- (1) Plug USB port of the base into the computer's USB port.
- (2) Windows will prompt new hardware found "USB Human Interface Device", and automatically installs the driver.
- (3) After the installation is complete, the bottom right of the screen displays "hardware is installed and ready to use."
- (4) If it fails, pull out the USB port of the base from the computer, repeat steps 1-3.

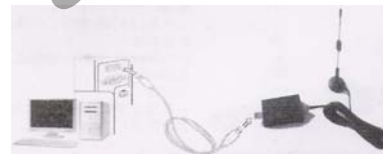

◆ Antenna Installation

- (1) Keep the antenna straight up, so that the antenna interface can connect to interface of base antenna.
- (2) Don't move the antenna, screw the antenna of the head cap with Clockwise for three or four circles, until the world is stable.

Note: Uninstall the antenna by reverse order of steps

★ wireless data transmission of sound and light tips (scanner)

successful data transfer	sound (buzzer)	blue light
yes	one ring	one light
No	three rings	three lights